




MFG

T

Shenzhen Megmeet Electrical Co., Ltd.(Stock Code:002851) is a one-stop solution provider for the R&D, electronics and automatic control echnology. Company's main business covers six parts: power supply products, industrial automation, new energy vehicle& rail transit, intelligent equipment, smart appliance electronic control and precision connection.

Our company has established a strong platform of R&D, manufacturing, marketing and service with more than 2800 R&D personnel and a total of more than 7800 employees. We have established R&D centers in Shenzhen City, Changsha City, Xi'an City, Wuhan City, Zhuzhou City, Hangzhou City, Taizhou City and Chengdu City; overseas research institutes in the United States, Germany, and Sweden; manufacturing centers in Zhuzhou City, Dongguan City, Heyuan City, Taizhou City, and Yiwu City; overseas factories in Thailand and India; overseas marketing station in the United States, Japan, Korea, Southeast Asia, India, Germany, Poland, Romania, Turkey, Sweden to provide quality service resources.

control and energy saving.

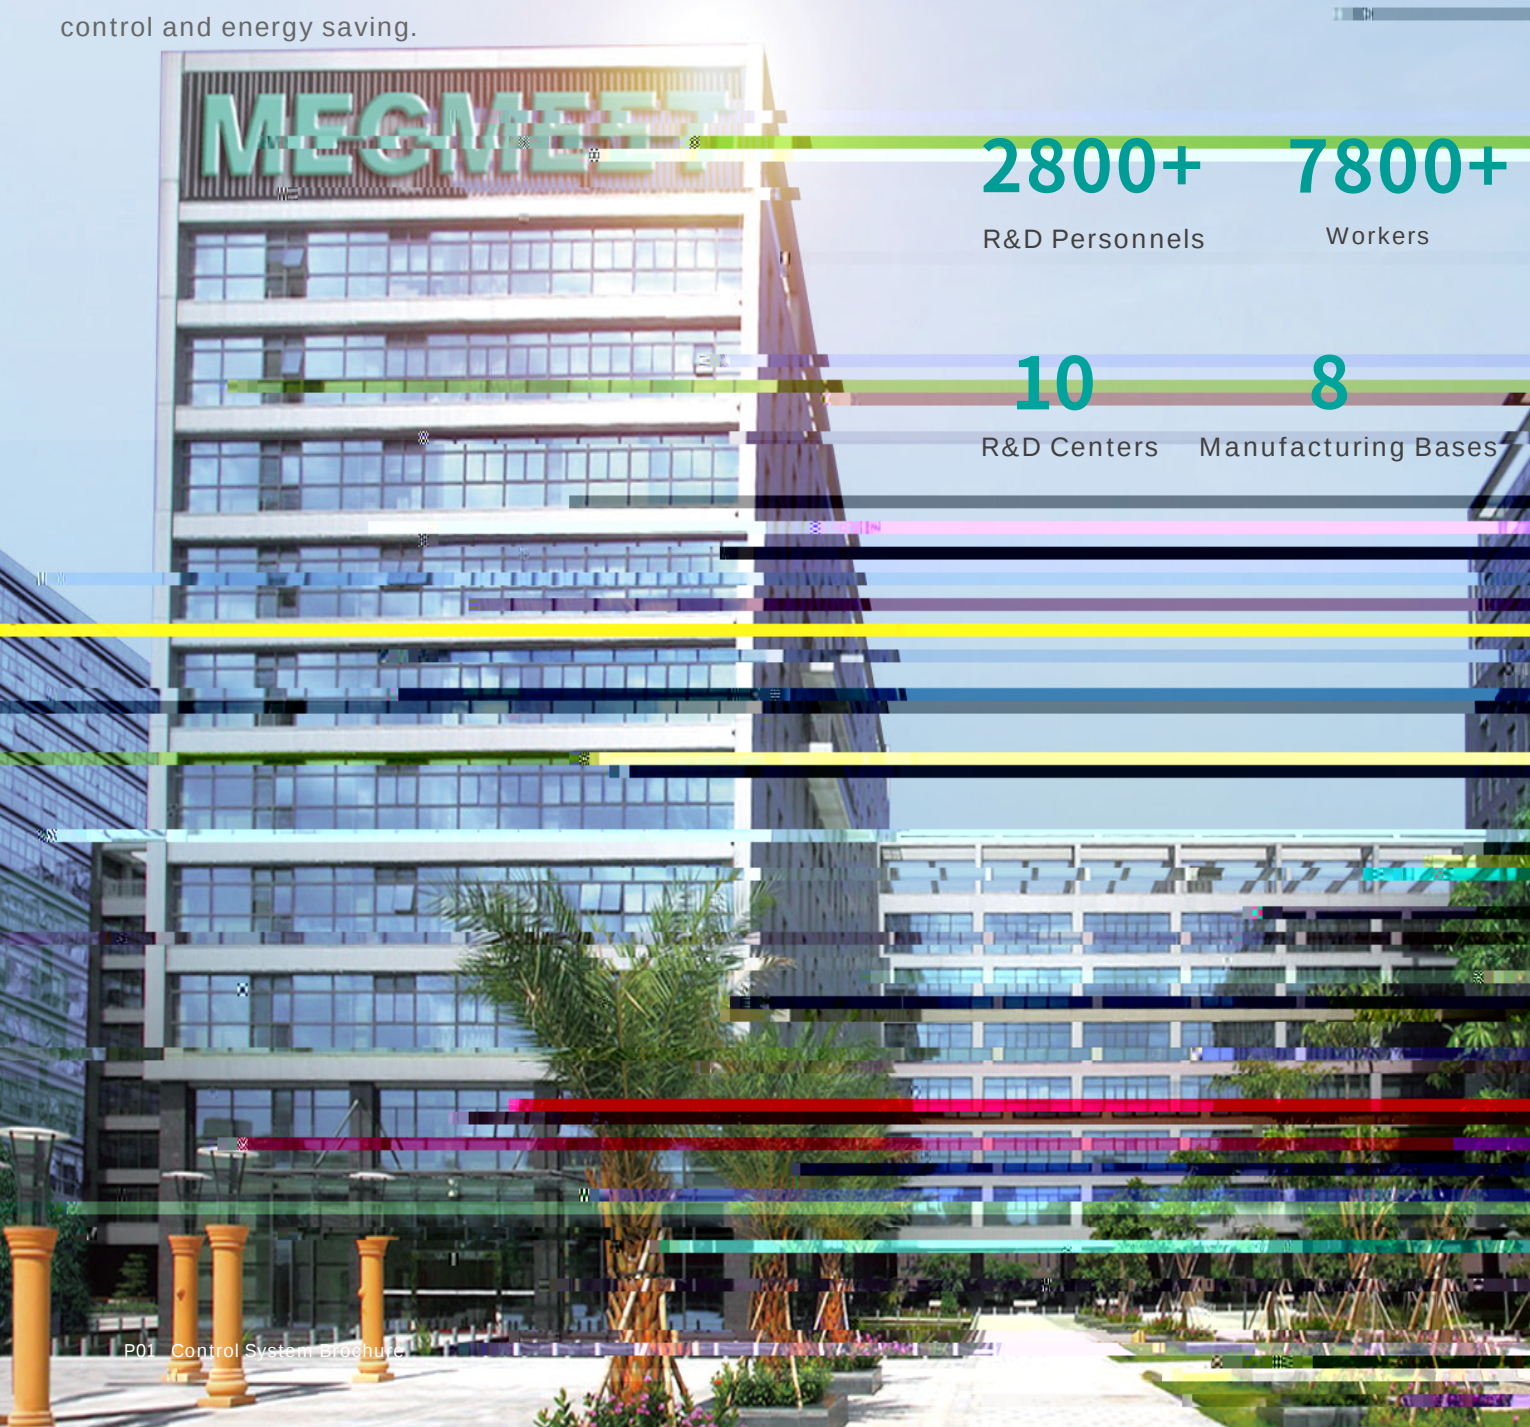

Contents

Medium PLC

03/07	KV4 . . Qcpgcq KA6 . . . Qcpgcq KA4 . . . Qcpgcq KA3 . . . Qcpgcq
-------	--

Small PLC

08/18	KS2 . . Qcpgcq KS1 . . Qcpgcq KS0 . . Qcpgcq KA5 . . Qcpgcq KA06 . -KA0 . . C Qcpgcq KA0 . . Qcpgcq KA/ . . Qcpgcq
-------	--

Remote I/O Module

19/20	KP2 . . Qcpgcq KA3 . . . Q Qcpgcq
-------	--------------------------------------

Temperature Controller

21/26	KOR Qcpgcq KRA-KRAU-KRAT Qcpgcq KRAC Qcpgcq KA?Q Qcpgcq KBR Qcpgcq
-------	--

Cable List


27	A_`jc Jgqr
----	------------

HMI

29/30	KX6 . . Qcpgcq
-------	----------------

MC8000 Series Medium PLC *

MC8000 series product is a new generation of high-performance and cost-effective medium PLC based on the mOPAX platform of MEGMEET. It is fully compatible with the IEC61131-3 programming specification and supports LD, ST, SFC, CFC, FBD, and IL programming languages; adopts the blade-type module design, and supports multi-core processor. Based on multi-bus protocols such as EtherCAT and Profinet, a multi-axis motion control system is constructed, to meet the high-speed response requirements of intelligent devices.

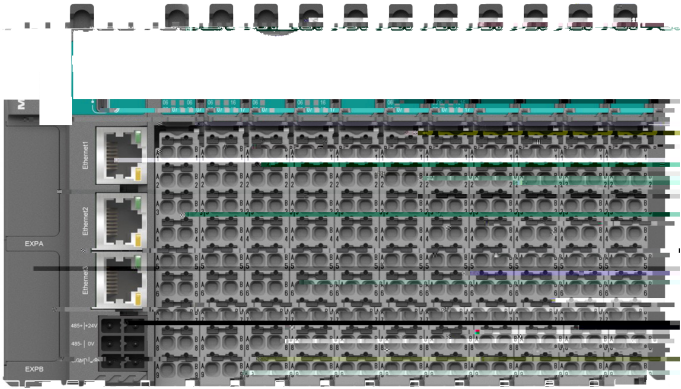

*Developing
Coming soon

Product Feature

Qrpmle cvn_l qgm l \$ l crumpig le

- Expand up to 32 modules, support the expansion of digital, analog, CAN, RS485, RS232, etc.
- Full protocol compatibility, support Modbus/ EtherCAT/EtherNet IP/Profinet and others.

Pcjg_`jw cvacjjc l r ncpdmp k _l ac

- Four-core A55 processor, communication, logic and algorithm are completely independent.
- 8*200K high-speed input, 8*200K pulse output (single pulse, pulse + direction, AB phase, FWD+REV, etc.)

Npcagqc Ksjrg+_vgq am l rpmj

- 1ms/16-axis sync, support 16/32/64-axis EtherCAT control

Djcvq`jc \$ am l tc lgc l r mn cp_rgm l

- 12mm machine body, saving space
- PUSH In terminal, easily wiring and replacing without tools

Sjrp_+j_pec a _n_agrw

- Support 10M program capacity, 20M data capacity, 512KB retention, for complex logic and data processing

1

2

3

4

5



Model		Description		Speci cation	
		CPU Module			
		IO of Main Module		Number of bus control axis	
MC5200E	Input: 16-channel	-		Standard medium module	
	Output: 16-channel transistor				
MC5100EA	Input: 4-channel 200K pulse 3-channel 1M differential pulse	-		Pulse main module	
	Output: 4-channel transistor, 6×2M differential pulse channel				
MC5101EB	Input:8-channel(support 4-channel 200K pulse)	-		Pulse main module	
	Output:8-channel transistor(support 4-channel 200K pulse)				
MC5000E8	Input: 16-channel	8-axis EtherCAT		Bus main module	
	Output: 16-channel transistor				
MC5000E16	Input: 16-channel	16-axis EtherCAT		Bus main module	
	Output: 16-channel transistor				
MC5000E32	Input: 16-channel	32-axis EtherCAT		Bus main module	
	Output: 16-channel transistor				
MC5000E64	Input: 16-channel	64-axis EtherCAT		Bus main module	
	Output: 16-channel transistor				
MC5001EB8	Input:8-channel(support 4-channel 200K pulse)	8-axis EtherCAT		Bus main module	
	Output:8-channel transistor(support 4-channel 200K pulse)				
MC5001EB16	Input:8-channel(support 4-channel 200K pulse)	16-axis EtherCAT		Bus main module	
	Output:8-channel transistor(support 4-channel 200K pulse)				
MC5001EB32	Input:8-channel(support 4-channel 200K pulse)	32-axis EtherCAT		Bus main module	
	Output:8-channel transistor(support 4-channel 200K pulse)				
MC5001EB64	Input:8-channel(support 4-channel 200K pulse)	64-axis EtherCAT		Bus main module	
	Output:8-channel transistor(support 4-channel 200K pulse)				
MC5000EA8	Input: 4-channel 200K pulse 3-channel 1M differential pulse	8-axis EtherCAT		Bus main module	
	Output: 4-channel transistor, 6×2M differential pulse channel				
MC5000EA16	Input: 4-channel 200K pulse 3-channel 1M differential pulse	16-axis EtherCAT		Bus main module	
	Output: 4-channel transistor, 6×2M differential pulse channel				

Applicable to MC6000/MC5000 basic modules and MC5000S remote IO modules

Power Module		
MP50AC220	Input: 100~240Vac, Output: 24V/2A	AC power module
IO Expansion Module		
MC5000-3232ETN	32-point 24DVC input, 32-point transistor output	Cluster terminal
MC5000-1616ETN	16-point 24DVC input, 16-point transistor output	Cluster terminal
MC5000-3200ENN	32-point 24DVC input	Cluster terminal
MC5000-0032ETN	32-point transistor output	Cluster terminal
MC5000-6400ENN	64-point 24DVC input	Cluster terminal
MC5000-0064ETN	64-point transistor output	Cluster terminal
MC5000-1600ENN-T	16-point 24DVC input	Plug-pull screw terminal
MC5000-0016ERN-T	16-point relay output	Plug-pull screw terminal
MC5000-0016ETN-T	16-point transistor output	Plug-pull screw terminal
MC5000-3200ENN-P	32-point IO input	Euroblock
MC5000-0032ETN-P	32-point IO output	Euroblock
MC5000-1616ETN-PH	16-point 24DVC input, 16-point transistor output (with 4 channels high-speed counter)	Euroblock
MC5000-1600ENN-P	16-point IO input	Euroblock
MC5000-0016ETN-P	16-point IO output	Euroblock
MC5000-0016ERN-P	16-point relay output	Euroblock
MC5000-0014EPN-P	14-point high-side transistor output	Euroblock
Special Function Module		
MC5000-8PO	8-axis 200KHZ pulse output module (1 main module can con gure up to 4, MC5000 only)	Cluster terminal
MC5000-4AD/8AD	4/8-channel analog quantity input module	Plug-pull screw terminal
MC5000-4DA	4-channel analog quantity output module	Plug-pull screw terminal
MC5000-4PT	4-channel thermal resistance temperature module	Plug-pull screw terminal
MC5000-4TC/8TC	4/8-channel thermocouple temperature module	Plug-pull screw terminal
MC5000-2WT*	2-channel weighing module	Plug-pull screw terminal
MC5000-4DA-P	4-channel analog quantity output module	Euroblock
MC5000-6AD-P	6-channel analog quantity input module	Euroblock
MC5000-8TC-P	8-channel thermocouple temperature module	Euroblock
Remote IO Module		
MC5000S-ET	EtherCAT expansion rack	EtherCAT slave station
MC5000S-EIP	EtherNet/IP expansion rack	EtherNet/IP slave station
MC5000S-PN	Pro Net expansion rack	Pro Net slave station
Accessory		
MCA05-100L	1m terminal line	Tieline
MCA05-150L	1.5m terminal line	Tieline
MCA10-40P	40PIN terminal	Wiring terminal

MU300 Series Small PLC

E-gear and other control function, to achieve high-speed operation and efficient communication, flexible configuration and

Product Feature

Flexible expansion


-
-

Excellent performance for precise control

- significantly improved based on ARM+FPGA
- Support 8-channel 200K high-speed pulse output and single-phase pulse count, or 4-channel 100K AB-phase, CW/CCW, pulse+direction
-

Basic Module (AC Power)

Model	Description	Dimensions(mm) LxWxH
MU300-0808BTA16	8-point DC24V input, 8-point transistor output (16 bus axis)	
MU300-0808BTA8	8-point DC24V input, 8-point transistor output (8 bus axis)	
MU300-1210BTA16	12-point DC24V input, 10-point transistor output (16 bus axis)	
MU300-1210BTA8	12-point DC24V input, 10-point transistor output (8 bus axis)	
1P		

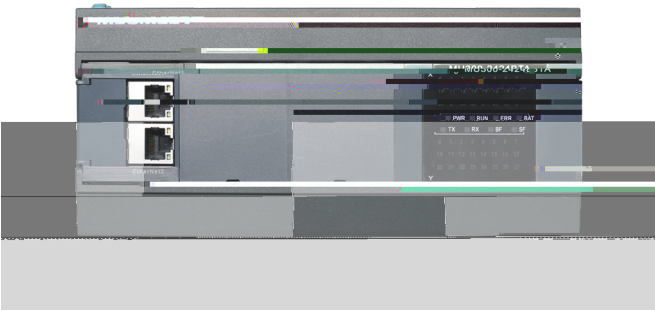

EtherCAT Control

- μ
- Communication port: 1*EtherCAT+2*EtherNet,

Networking based on multi-communication

-
-
-

MU200 Series Small PLC

MU200 new generation of small PLC uses ARM+FPGA dual-core processor for the powerful processing function,

Product Feature

Networking based on multi-communication

-
-

Excellent performance for precise control

- significantly improved based on ARM+FPGA
- Support up to 12-channel 200K high-speed pulse output
-



Flexible expansion

-
-

Convenient hardware configuration

- Convenient hardware configuration
-
-
-
-

MC700 Series Motion Controller

Basic Module (AC Power)

Model	Description	Dimensions(mm) LxWxH
MU200-4040BTA	40-point DC24V input, 40-point transistor output	246x90x85
MU200-4040BRA	40-point DC24V input, 40-point relay output	
MU200-3232BTA	32-point DC24V input, 32-point transistor output	210x90x85
MU200-3232BRA	32-point DC24V input, 32-point relay output	
MU200-2424BTA	24-point DC24V input, 24-point transistor output	180x90x85
MU200-2424BRA	24-point DC24V input, 24-point relay output	
MU200-1616BTA	16-point DC24V input, 16-point transistor output	145x90x85
MU200-1616BRA	16-point DC24V input, 16-point relay output	

IO Expansion Module Applicable to the basic modules of MU300/MU200 series PLC

Model	Description	Dimensions(mm) LxWxH
MU200-0016ERN	16-point relay output	60x90x85
MU200-0016ETN	16-point transistor output	
MU200-1600ENN	16-point intput	
MU200-0808ERN	8-point DC24V input, 8-point relay output	
MU200-0808ETN	8-point DC24V input, 8-point transistor output	

Special Function Module Applicable to the basic modules of MU300/MU200 series PLC

Model	Description	Dimensions(mm) LxWxH
MU200-4AD	4-channel analog quantity input	60x90x85
MU200-8AD	8-channel analog quantity input	
MU200-4DA	4-channel analog quantity output	
MU200-8TC	8-channel thermocouple	
MU200-4PT	4-channel thermal resistance	

Expansion Card Applicable to the basic modules of MU300/MU200 series PLC

Model	Description	Dimensions(mm) LxWxH
MUE-4X	4-point input	38x46.4x11.5
MUE-4Y	4-point output	
MUE-4XY	2-point input and 2-point output	
MUE-2AD	2-channel analog quantity input	
MUE-2DA	2-channel analog quantity output	
MUE-2AM	1-channel analog quantity input and 1-channel analog quantity output	
MUE-RS232	RS232 communication	
MUE-RS485	RS485 communication	
MUE-CAN	CAN communication	

MC200 Series Small PLC



Product Feature

High speed and large capacity

- Program capacity: 12K
- 16-bit 120ns μ PRO-16

High stability and reliability

- 100% self-checking
- Input filter protection and power loss protection
- 100% self-diagnosis

Reliable program security

-

Strong expansion capability

- 16-slot expansion
- 16-slot expansion
- 16-slot expansion

Excellent communication networking

- RS-485
- RS-485
- RS-485

Basic Module (AC Power)

Model	Speci cation	Dimensions(mm) LxWxH
MC200-2012BRA	20-point 24VDC input, 12-point relay output	158x90x82
MC200-2012BTA	20-point 24VDC input, 12-point transistor output	
MC200-3232BRA	32-point 24VDC input, 32-point relay output	228x90x82
MC200-3232BTA	32-point 24VDC input, 32-point transistor output	
MC200-4040BRA	40-point 24VDC input, 40-point relay output	275x90x82
MC200-4040BTA	40-point 24VDC input, 40-point transistor output	

IO Expansion Module Applicable to the basic modules of MC280/MC200E/MC200 series PLC

Model	Speci cation	Dimensions(mm) LxWxH
MC200-0800ENN	8-point 24VDC input	58x90x82
MC200-1600ENN	16-point 24VDC input	
MC200-0008ERN	8-point relay output	
MC200-0008ETN	8-point transistor output	
MC200-0808ERN	8-point 24VDC input, 8-point relay output	
MC200-0808ETN	8-point 24VDC input, 8-point transistor output	
MC200-0016ERN	16-point relay output	
MC200-0016ETN	16-point transistor output	
MC200-1616ERN	20-point 24VDC input, 12-point relay output	158x90x82
MC200-1616ETN	16-point 24VDC input, 16-point transistor output(Active)	
MC200-1616ERA	16-point 24VDC input, 16-point relay output(Active)	
MC200-1616ETA	16-point 24VDC input, 16-point transistor output(Active)	

Special Function Module Applicable to the basic modules of MC280/MC200E/MC200 series PLC

Model	Speci cation	Dimensions(mm) LxWxH
MC200-2AD MC200-4AD	2-point, 4-point analog quantity input	58x90x82
MC200-2DA MC200-4DA	2-point, 4-point analog quantity output	
MC200-8AD	8-point analog quantity input	
MC200-4AM	2-point analog quantity input, 2-point analog quantity output	
MC200-5AM	4-point analog quantity input, 1-point analog quantity output	
MC200-2TC MC200-4TC	2-point, 4-point thermocouple	
MC200-8TC	8-point thermocouple	
MC200-2PT MC200-4PT	2-point, 4-point thermal resistance	
MC200-2HC	2-channel high-speed count module: single-phase 200K; bi-directional phase 100K; 1-channel pulse following output 20K	

Communication Module Applicable to the basic modules of MC280/MC200E/MC200 series PLC

Model	Speci cation	Dimensions(mm) LxWxH
MC200-CPM	CANopen master communication module	58x90x82
MC200-CAN	CAN communication module	
MC200-RS485	RS485 communication module	
MC200-WEN	Ethernet communication module	

T




T



MQT Series Temperature Controller

modules flexibly and integrating internal intelligent PID algorithm; it has the advantages of cascade, high precision,

- Fge f n p c a g g m l 8
- Fge f n c p d m p k _ l a c 8
- Q r p m l e d s l a r g m l 8
- Q g k n j c g l q r _ j j _ r g m l 8
- A m k n j c r c k m b s j c 8

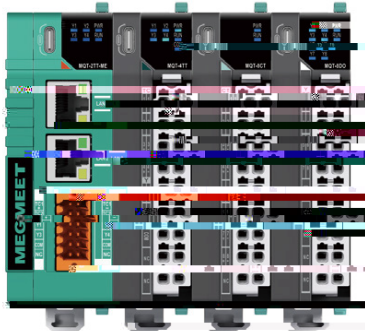

Item	Description	
Power supply	24VDC -15% ~ 20%	
Signal input	Input type	Thermocouple K J E N T R B For all channel
		Thermal resistance Pt100 JPt100 Cu100 Ni120 For all channel
	Precision	Thermocouple 0.15% Full scale cold compensation
		Thermal resistance 0.3% Full scale
	Sampling cycle	25ms/channel 100ms/8 channels 100ms/4 channels
Control output	Output form	Transistor output (SSR drive output), relay output, current output, voltage output
	Control action	Manual, ON / OFF, single PID, heating & cooling PID, position proportional PID
Alarm output	Alarm form	14 alarms, such as upper and lower limit alarm, deviation alarm and so on.
	Output form	Transistor and relay output (output state can be directly controlled by writing registers)
	Output channel	8 channels
Digital input	Input form	Transistor input
	Input channel	4 channels
Control cycle	0.1s - 10s or 1s - 100s	
Acquisition channel	4 channels and 8 channels	
Isolation	Exist between power and communication, power and channel, communication and channel, channel and channel	
Communication port	RS485/Modbus-TCP/EtherNet/EtherCAT/Profinet	
Generals	Ambient temperature	Working: -20 ~ 60 °C, storage: -40 ~ 70 °C
	Ambient humidity	Working: 10 ~ 90 % RH (no condensation), keeping: 5 ~ 95 % RH (no condensation)
	Altitude	Below 2000m
	Protection level	IP20
C & S	Conform to IEC/EN 61326-1 For use in industrial locations CE	

Kmbcj	?aosgggrgm l af _l l cj	Rc k ncp_rspc am l rpmj msrnsr	?j_p k msrnsr	6 l nsr rwn c
MQT-2TT-ME	2-CH	Modbus TCP/IP/Ethernet	Transistor(4-CH)	TC
MQT-2RT-ME	2-CH	Modbus TCP/IP/Ethernet	Transistor(4-CH)	RTD
MQT-2TT-ET	2-CH	EtherCAT	Transistor(4-CH)	TC
MQT-2RT-ET	2-CH	EtherCAT	Transistor(4-CH)	RTD
MQT-2TT-RS	2-CH	Modbus RS485	Transistor(4-CH)	TC
MQT-2RT-RS	2-CH	Modbus RS485	Transistor(4-CH)	RTD
MQT-2TT-PN	2-CH	Profinet	Transistor(4-CH)	TC
MQT-2RT-PN	2-CH	Profinet	Transistor(4-CH)	RTD
Rc k ncp_rspc am l rpmj k mbsjc				
MQT-4TT	4-CH	Modbus RS485	Transistor(4-CH)	TC
MQT-4TA	4-CH	Modbus RS485	Analog(4-CH)	TC
MQT-4TR	4-CH	Modbus RS485	Relay(4-CH)	TC
MQT-4RT	4-CH	Modbus RS485	Transistor(4-CH)	RTD
MQT-4RA	4-CH	Modbus RS485	Analog(4-CH)	RTD
MQT-4RR	4-CH	Modbus RS485	Relay(4-CH)	RTD
Cvn _l qgm l k mbsjc				
MQT-8DI	8-CH	8-channel digital input	-	
MQT-8DO	8-CH	8-channel digital output	Digital (8-CH)	
MQT-8CT	8-CH	8-channel current detection	-	
MQT-8DM	8-CH	4-channel digital input, 4-channel digital output	Digital (4-CH)	
MQT-8AI	8-CH	8-channel analog current input	-	
MQT-8AV	8-CH	8-channel analog voltage input	-	
MQT-8AO	8-CH	8-channel analog output	Analog (8-CH)	

MTC/MTCW/MTCV series products are multi-channel and high-precision temperature controllers, which are suitable for various occasions of temperature control. Its main feature is compatible with TC and RTD, high measure accuracy; high integration (one module supports up to 12 channels of temperature control and 16 channels of measurement), space saving, easy data exchange, remote monitoring, and high cost performance.

- Bcbga_rcb qmdr u_pc8


Provide special software - MtcCompanion
- Bs_j+N6B ds l argm l 8

Heating&cooling dual-PID control function, 14 alarms like upper and lower limits, deviation, etc
- Fge f npcagqgm l

Intelligent self-tuning and multi-stage temperature setting functions to achieve high-precision temperature control
- Ksjrg+u_w am l rpmj

Integrated multi-channel temperature control to centralize data management
- C_qw cva f_l ec

Data exchange easily between thermostat and PLC, thermostat and HMI, thermostat and computer through Ethernet and serial port

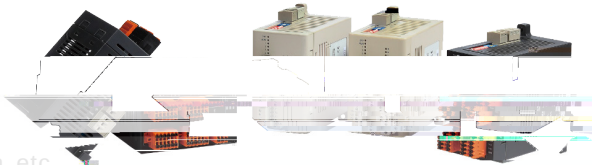

Item	Description	
Power supply	24VDC -15% ~ 20%	
Signal input	Input type	
	Precision	Thermocouple
	Sampling cycle	
	Output form	
Control output	Control action	
	Alarm form	
Alarm output	Output form	
	Output channel	
IO input	Input form	
	Input channel	
Control cycle		
Acquisition channel		
Isolation		
Communication port		
Generals	Ambient temperature	
	Ambient humidity	
	Altitude	
	Protection level	
C & S	Conform to IEC/EN 61326-1 For use in industrial locations UL61010-1 CE UL	

MTCE series product, as a multi-channel high-precision EtherCAT temperature controller, are adapted to various mainstream master stations. Its main feature is compatible with thermocouples and thermal resistors, high measurement accuracy, feature-rich, user-friendly. It has the characteristics of high integration, space saving, easy data exchange, remote monitoring, and high cost performance.

Learn more

EtherCAT

Measure accuracy: full scale of $\pm 0.15\%$; control accuracy: $\pm 0.2^{\circ}\text{C}$

0.1s sampling cycle, and 1ms synchronization cycle; a single module can operate PID control and simple logic operation, and monitor analog value



Item	Description	
	24VDC -15% ~ 20%	
	EtherCAT	
		RTD
		TC
		Flag bit
		Flag bit

Product model

Model	Acquisition channel	Temperature control output	Alarm output	Input type
MTCE-10T-NT	10-CH			Transistor

Product Feature

Function

0.1s sampling cycle

Function

Measure accuracy: full scale of $\pm 0.15\%$; cascade control accuracy: ± 0.5

Input type

Sampling cycle

Precision

I=

Oute

Oute

f

~

÷

η

-

t

r

]

f

B

MZ800 Series Human Machine Interface



Picture

Model/Series

Display size



MZ800-TT210SK30W



MZ800-TT215SK31



MZ800-TT07SK31M



MZ800-TT210SK31M



MZ800-TT22P